COPPER TUBING HANGERS



Fig. CT-121

Copper Tubing Riser Clamp

Size Range: 1/2" through 4"
Material: Carbon steel
Finish: Copper plated

Service: Recommended for support and steadying of copper tube risers, either insulated or non-insulated. This product is not intended for use with hanger rods.

Approvals: Complies with Federal Specification A-A-1192A (Type 8), *WW-H-171-E (Type 8)*, ANSI/MSS SP-69 and MSS SP-58 (Type 8).

Service: For support and steadying of copper tubing risers. **Installation:** Clamp is fitted and bolted preferably below a coupling or fitting on the tubing. Do not over tighten bolts. **Features:** Rounded ears provide greater safety for personnel.

Ordering: Specify tube size, figure number, and name.



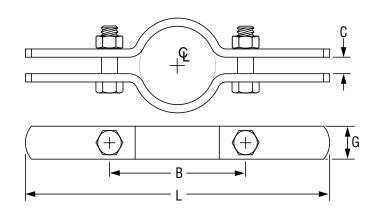


FIG. CT-121: LOADS (LBS) • WEIGHT (LBS) • DIMENSIONS (IN) • TORQUE (FT-LBS)							
Tube Size	Max Load	Weight	L	G Width	Bolt Size	Torque Values	
1/2	75	0.52	6½	1	5/16	11	
3/4		0.56	7				
1	120	0.94	93//8	11/4	3/8	21	
11/4	150	0.98	95//8				
1½		1.50	10				
2		1.50	103/8				
2 ¹ / ₂	300	1.70	11 ¹³ / ₁₆				
3		1.80	11½				
31/2		1.90	12				
4		2.60	13	1	1/2	46	

Note: Minimum loads per MSS SP only applicable to 11/4" and up.

PROJECT INFORMATION	APPROVAL STAMP
Project:	☐ Approved
Address:	Approved as noted
Contractor:	☐ Not approved
Engineer:	Remarks:
Submittal Date:	
Notes 1:	
Notes 2:	