




REVERSIBLE STRUT BRACKET



Α	Std. Pkg.	Uniform Load Capacity (Lbs)
6"	Bulk	1,932
12"	Bulk	1,107
18"	10	759
24"	Bulk	332


Note: 1. Loads Based On Actual Independent Lab Testing On 12 Gage Channel

2. Safety Factor = 2.5

Ordering: Specify Part number, length (A) and finish

Std Pkg: See chart above.

□ AS 809 □ EG, □ GR, □ ZTC




A	Uniform Load Capacity (Lbs)
12"	1,621
18"	1,234
24"	905
30"	727
36"	600


Note: 1. Loads Based On Actual Independent Lab Testing On 12 Gage Channel

2. Safety Factor = 2.5

Ordering: Specify Part number, length (A) and finish

Std Pkg Bulk

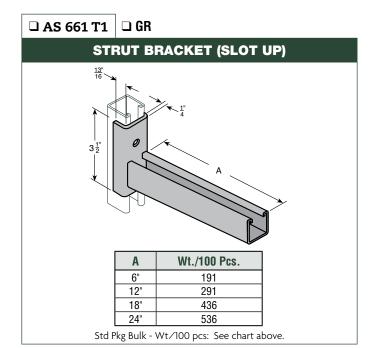



LEGEND:

GR: Powder Coated Supr-Green **EG**: Electro-Galvanized **PG**: Pre-Galvanized **AL**: Aluminum **HG**: Hot Dipped Galvanized **PL**: Plain **SS**: Stainless Steel **ZTC**: Zinc Trivalent Chromium Stainless Steel **(SS)**, Zinc Trivalent Chromium **(ZTC)** and Hot Dipped Galvanized **(HG)** are specialty finishes. Pricing is located in the Specialty Strut Section of the Anvil-Strut price book.

PROJECT INFORMATION	APPROVAL STAMP
Project:	☐ Approved
Address:	Approved as noted
Contractor:	☐ Not approved
Engineer:	Remarks:
Submittal Date:	
Notes 1:	
Notes 2:	