




BTU Series True Union Ball Valve

Product Specifications



PRODUCT FEATURES

- PVC Schedule 80 True Union Serviceable Ball Valve
- Rated @ 150PSI @ 72°F Static Pressure
- Molded in the USA
- Made of PVC Type I Material EPDM O-Rings
- Valves up to 2" size come with both slip and threaded connectors

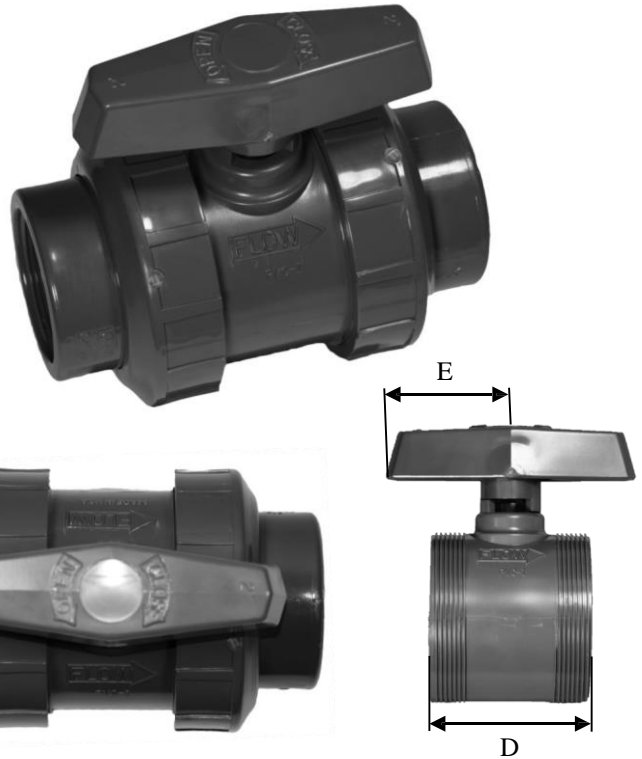

PART NUMBER	A (INCHES)	B (INCHES)	C (INCHES)	D (INCHES)	E (INCHES)	WEIGHT (LBS)	CONNECTION SIZE
MLBTU-0500-E	3.19	3.91	2.12	1.89	1.53	0.40	1/2" IPS
MLBTU-0750-E	3.81	4.72	2.58	2.40	1.90	0.65	3/4" IPS
MLBTU-1000-E	4.40	5.13	2.89	2.69	2.18	0.95	1" IPS
MLBTU-1250-E	5.50	5.96	3.75	3.16	2.48	1.65	1 1/4" IPS
MLBTU-1500-E	5.46	6.22	3.76	3.16	2.51	1.70	1 1/2" IPS
MLBTU-2000-E	6.30	6.94	4.43	3.46	2.72	2.50	2" IPS
MLBTU-2500-SE MLBTU-2500-TE	9.50	10.82	6.65	5.85	5.35	10.00	2 1/2" IPS
MLBTU-3000-SE MLBTU-3000-TE	9.75	10.80	6.65	5.85	5.35	10.40	3" IPS
MLBTU-4000-SE MLBTU-4000-TE	12.25	12.50	8.50	6.83	5.35	18.10	4" IPS

"E" - EPDM O-RING

"S" - SLIP

"T" - THREADED

Warranty: See warranty information for more details.

All dimensions listed are nominal. MAINLINE® reserves the right to make product and material changes at any time without notice.

Contact your sales representative for more information or visit our website at mainlinecollection.com