



MAINLINE®

Reliably Comfortable.® 

MLT725

Heat Pump/Conventional

1 Heat, 1 Cool Conventional


2 Heat, 1 Cool Heat Pump

Battery or Hardwire

7 Day, 5/1/1 or Non-Programmable



MLT725

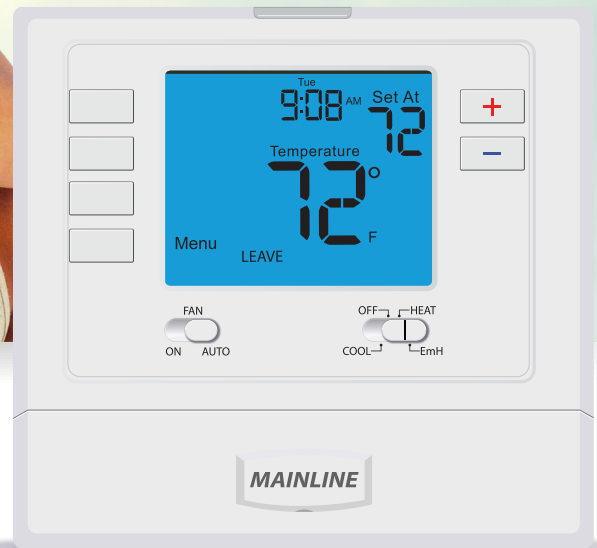

Reliably Comfortable.®



Universal Subbase

All Mainline thermostats have the same size footprint, making model upgrading a breeze. No wiring and no painting necessary.



Private Label Badge


All Mainline thermostats share a removable badge system that can be easily replaced with a custom badge that has your company's contact information. This free service is a great way to generate future business for your company.



Exclusively For Professionals

You don't have to compete with the giant big-box retailers. We sell our products exclusively to professional HVAC distributors.

MLT725 Specifications

 7D 7 Day Programmable 5/1/1 5/1/1 Programmable NP Non-Programmable	Model #	Stages of Heat	Stages of Cool	Heat pump with emergency heat compatible	Compatible with Conventional Systems	Display Size (Square Inches)	Auto Changeover	Filter Change Reminder Calibration	Room Temperature Adjustable	Temperature Swing Programmable	Adjustable Fan Setpoint Limits	Humidity Control	Memory Type (Permanent)	Touchscreen	Warranty (Years)	Remote Sensor Capable	Terminals
	MLT725	7D	5/1/1	NP	2*	1	•	•	4	•	•	•	•	•	5		R, C, Y, W2, W/E, G, O, B

Stages* - Single Stage for Conventional Heat

Specifications

- The display range of temperature ... 41°F to 95°F (5°C to 35°C)
- The control range of temperature.... 44°F to 90°F (7°C to 32°C)
- Swing (cycle rate differential)..... Heating is adjustable from 0.2° to 2.0°
Cooling is adjustable from 0.2° to 2.0°
- Power source 18 to 30 VAC, NEC Class II, 50/60 Hz
for hardwire (Common Wire)
battery power from 2 AA Alkaline batteries
- Operating ambient 32°F to +105°F (0°C to +41°C)
- Operating humidity 90% non-condensing maximum
- Dimensions of thermostat 4.7"W x 4.4"H x 0.8"D

