

ABS CONSTRUCTION

# Condensate Pumps

**HVAC**  
PUMP

## FEATURES

- Thermally protected, fan cooled motor
- ½ Gallon collection tank
- Stainless steel motor shaft
- Automatic operation
- 3/8" Barbed discharge with built-in check valve
- Four 1-1/8" inlet openings with removable caps
- Built-in safety switch with 8" leads\*
- Stainless steel wall mount tabs included
- 6' Power cord with grounded 3-prong plug
- Maximum water temperature 140° F

\* On select models only

**MLP77150**  
1/50 HP



**MLP77152**  
1/50 HP  
With Safety Switch



**MLP77202**  
1/30 HP  
With Safety Switch



**3 YEAR**  
LIMITED WARRANTY

AUTOMATIC  
FAN COOLED



ABS CONSTRUCTION  
**Condensate Pumps**



**Application**

For automatic removal of condensate from air conditioning coils, dehumidifiers, ice makers and refrigeration equipment when a drain is not accessible or practical. Pumps can also be used for high efficiency oil and gas-fired condensing furnace and boiler equipment.


Model	HP	Voltage	Amps	Hz	Watts	Discharge Size	Safety Switch Included	Max flow GPH	Max Head Ft.	Weight (lbs.)
MLP77150	1/50	115	1.2	60	65	3/8" OD Barbed	No	88	18'	4.1
MLP77152	1/50	115	1.2	60	65	3/8" OD Barbed	Yes	88	18'	4.2
MLP77202	1/30	115	1.5	60	80	3/8" OD Barbed	Yes	108	21'	4.6

**Motor & Pump Specifications**

Phase	Single
Motor Type	C-Frame / Shaded Pole
Insulation	Class A
Circuit Requirements	15 amp (min) individual circuit
Duty Rating	Continuous
Motor Shaft	Stainless Steel
Motor Bearings	Sleeve
Cooling	Fan cooled
Motor Protection	Auto reset thermal overload protector
Discharge Size	3/8" Barbed fitting with internal check valve
Power Cord Length	6'
Cord Type	SJTW, UL listed, 3-wire, 18 gauge
Tank	ABS
Motor/Upper Housing	ABS
Impeller Material	Reinforced Thermoplastic
Max Liquid Temp	140° F
Operation	Automatic

**Performances**

GPH @ listed discharge height	0'	5'	10'	15'	20'
MLP77150	88	84	66	6	0
MLP77152	88	84	66	6	0
MLP77202	108	102	78	54	15

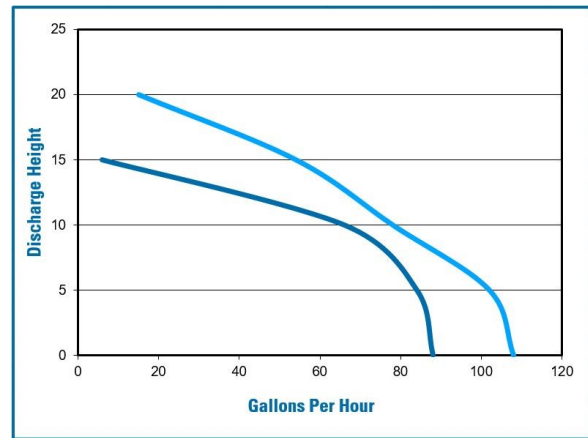

**Without safety switch**



**With safety switch**

