NORITZ

Tankless Water Heater Accessories
Specification Sheet
3" PVC Concentric Vent

- Made of PVC for use with our condensing, high-efficiency NRC98-DV, NCC199-DV, and NRC111-DV models only
- Compatible with Schedule 40 PVC/CPVC pipe and has two 3" connections for both intake and exhaust
- Concentric design allows for both intake and exhaust vents to be installed with a single wall penetration
- ULC-S636 approved for use in Canada

Dimensions

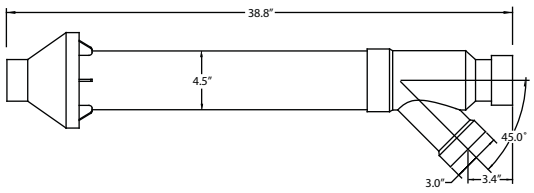

PVC Concentric Vent Kit

☐ *PVC Concentric Vent (#VK3-H-PVC)*

Compatible High-Efficiency Models

NRC98-DV
NCC199-DV
NRC111-DV

Installation Example

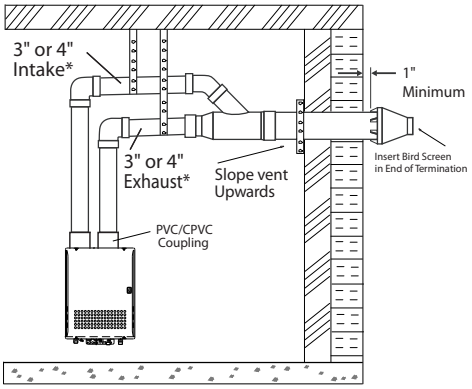

*4" pipe requires the use of a reducing coupling just prior to the termination.

NORITZ AMERICA CORPORATION
11160 Grace Avenue, Fountain Valley, CA 92708 Tel. 1-866-7NORITZ www.noritz.com