



MAINLINE®

Reliably Comfortable.® 

MLT501 ML2

Line Voltage

Electric Heat Thermostat
Two Wire
Non-Programmable

MLT501 ML2

Reliably Comfortable.®

- Ambient Temperature Display
- No Batteries Necessary
- Simple Single Dial Control
- Great For Baseboard Heaters



Exclusively For Professionals


You don't have to compete with the giant big-box retailers.
We sell our products exclusively to professional HVAC distributors.

MLT501ML2 Specifications

SWITCH RATING:

22.0A (2,500W) 120VAC. (NON-INDUCTIVE) MAX.
 22.0A (5,000W) 240VAC. (NON-INDUCTIVE) MAX.
 19.0A (5,000W) 277VAC. (NON-INDUCTIVE) MAX.

BLK-BLK OPENS ON TEMPERATURE RISE.

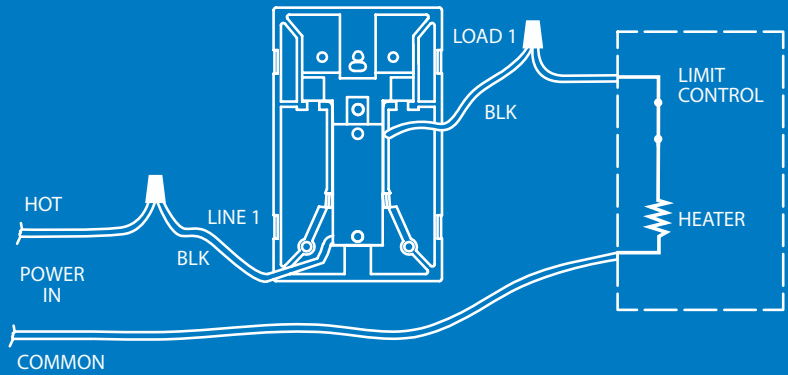

Specifications

| | |
|------------------------|--|
| Temperature Range..... | 50°F to 90°F (10°C to 32°C) |
| Electric Rating..... | 22A/120VAC Resistive (Non-Inductive) 22A/240VAC Resistive (Non-Inductive) 19A/277VAC Resistive (Non-Inductive) |
| Differential..... | 3°F Non-adjustable |
| Mount..... | Vertical |
| Color..... | White |
| T501ML2..... | SPST Switch - Single line disconnect Black - Black: Opens on temperature rise |
| Wire..... | 6 inch leads (12 AWG) |
| Dimensions..... | W - 2.9", L - 4.7" |
| Application..... | Electric heat thermostat |
| Warranty..... | 2 year |



Rev. 1919