
Hex Lag Bolt Zinc Plated

Product Specifications



PRODUCT FEATURES

Zinc Plated

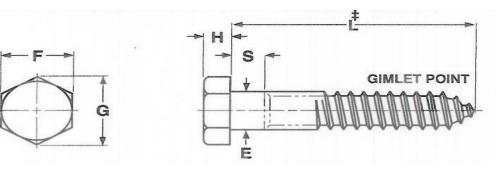

| | | | E | | F | | G | | н | | S | | |
|---------|----------|-------------------|-------|--------------|--------|----------------|-------|-------------|-------|----------|-------|-------|-------|
| | | | | Width | | Width | | Head Height | | Shoulder | | | |
| Threads | | Shoulder Diameter | | Across Flats | | Across Corners | | | | Length | | | |
| Basic I | Diameter | Per Inch | Min | Max | Basic | Min | Max | Min | Max | Basic | Min | Max | Min |
| 10 | 0.1900 | 11 | 0.178 | 0.199 | 9/32 | 0.271 | 0.281 | 0.309 | 0.323 | 1/8 | 0.110 | 0.140 | 0.094 |
| 1/4 | 0.2500 | 10 | 0.237 | 0.260 | 7/16 | 0.425 | 0.438 | 0.484 | 0.505 | 11/64 | 0.150 | 0.188 | 0.094 |
| 5/16 | 0.3125 | 9 | 0.298 | 0.324 | 1/2 | 0.484 | 0.500 | 0.552 | 0.577 | 7/32 | 0.195 | 0.235 | 0.125 |
| 3/8 | 0.3750 | 7 | 0.360 | 0.388 | 9/16 | 0.544 | 0.562 | 0.620 | 0.650 | 1/4 | 0.226 | 0.268 | 0.125 |
| 7/16 | 0.4375 | 7 | 0.421 | 0.452 | 5/8 | 0.603 | 0.625 | 0.687 | 0.722 | 19/64 | 0.272 | 0.316 | 0.156 |
| 1/2 | 0.5000 | 6 | 0.482 | 0.515 | 3/4 | 0.725 | 0.750 | 0.826 | 0.866 | 11/32 | 0.302 | 0.364 | 0.156 |
| 5/8 | 0.6250 | 5 | 0.605 | 0.642 | 15/16 | 0.906 | .0938 | 1.033 | 1.083 | 27/64 | 0.378 | 0.444 | 0.312 |
| 3/4 | 0.7500 | 4-1/2 | 0.729 | 0.768 | 1-1/8 | 1.088 | 1.125 | 1.240 | 1.299 | 1/2 | 0.455 | 0.524 | 0.375 |
| 7/8 | 0.8750 | 4 | 0.852 | 0.895 | 1-5/16 | 1.269 | 1.312 | 1.447 | 1.516 | 37/64 | 0.531 | 0.604 | 0.375 |

| | Screw Size | ScrewLength | | | | |
|---------------------|-----------------|-------------|---------|--|--|--|
| Tolerance on Length | | Thru 6" | Over 6" | | | |
| | 1/2 and smaller | ±0.12 | ±0.25 | | | |
| | Over 1/2 | ±0.25 | ±0.25 | | | |

| | | 1/4" through 1/2" Diameter Steel | 1/4" through 1/2" Diameter Stainless Steel | | | | |
|-----------------------------------|--|--|--|--|--|--|--|
| Hardness | Rockwell | B70 - B100 | B95 - C32 | | | | |
| Tensile Strength | psi | 60,000 min | ≈ 100,000 -125,000 | | | | |
| Material Minimum Thread Length | | AISI 1006-1022 or equivalent | 18-8 Stainless | | | | |
| Minimum mreau Lengur | | The minimum thread length is 1/2 of the length of the screw plus 1/2" or 5" whichever is shorther. | | | | | |
| Heat Treatment | hardness properties above. The only heat treatment normally available is annealing which | | | | | | |
| | approximately 1900°F to a dead soft condition and is not reversible. | | | | | | |

Warranty: See warranty information for more details.

All dimensions listed are nominal. MAINLINE® reserves the right to make product and material changes at any time without notice.

Contact your sales representative for more information or visit our website at mainlinecollection.com