
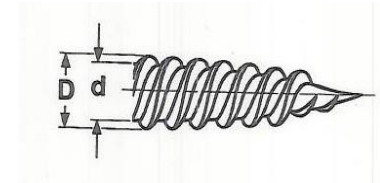



# Hex Washer Head White Register Screw

## Product Specifications



Size	A		W	H		F		U		J		T		D		d	
	Width Across Flats		Width Across Corner	Head Height		Washer Diameter		Washer Thickness		Slot Width		Slot Depth		Major Diameter		Minor Diameter	
	Min	Max	Min	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
8-15	.244	.250	.272	.096	.110	.322	.348	.019	.031	.045	.054	.052	.074	.162	.168	.116	.123

Tolerance on Length  $\pm 0.05$

<b>Material</b>	AISI 1018 or equivalent steel
<b>Heat Treatment</b>	Screws should be dipped in liquid and then tempered to a minimum of 650°F
<b>Surface Hardness</b>	Rockwell C45 minimum
<b>Case Depth</b>	No .6 diameter: .002 - .007 & No. 7 thru 10 diameter: .004 - .009
<b>Core Hardness after</b>	Rockwell C28-38

**Warranty:** See warranty information for more details.

All dimensions listed are nominal. MAINLINE® reserves the right to make product and material changes at any time without notice.

Contact your sales representative for more information or visit our website at [mainlinecollection.com](http://mainlinecollection.com)