




Standard Aluminum Base Roof Flashing

Product Specifications

FEATURES

- 25 mil. aluminum base with elastomer collar
- Fits any roof pitch to 45 degrees
- Tested for ultraviolet, ozone, and weather resistance
- Elastomer collar heat tested to 180 degrees Fahrenheit
- Approved for Type "B" installations

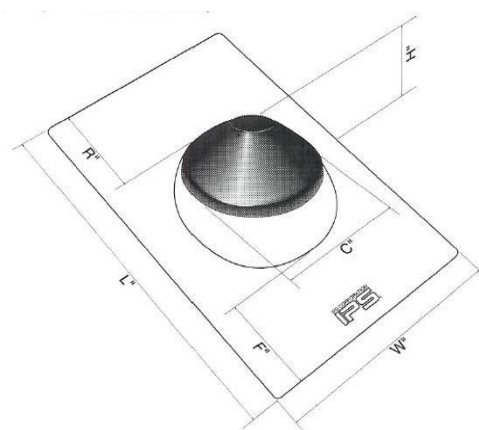

✓ To Submit	Part #	Description	Dim W	Dim L	Dim R	Dim F	Dim C	Dim H
	ML81900	1-1/4" or 1-1/2" Aluminum Roof Flashing	8 3/4"	12-1/2"	3-1/2"	2-3/8"	4-1/4"	2-1/4"
	ML81905	2" Aluminum Roof Flashing	8-3/4"	12-1/2"	3-1/2"	2-3/8"	4-1/4"	2-1/4"
	ML81910	3" Aluminum Roof Flashing	10-3/4"	14-1/2"	2-5/8"	2-3/8"	5-1/2"	2"
	ML81915	4" Aluminum Roof Flashing	12"	16"	3-3/4"	2-3/4"	6-1/2"	2-1/8"
	ML81916	1/2", 3/4" or 1" Aluminum Roof Flashing	8-3/4"	12-1/2"	3-1/2"	2-3/8"	4-1/4"	2-1/4"
	ML81920	1-1/4" or 1-1/2" Aluminum Roof Flashing	18"	18"	6-1/4"	5-7/8"	4-1/4"	2-1/4"
	ML81925	2" Aluminum Roof Flashing	18"	18"	6-1/4"	5-7/8"	4-1/4"	2-1/4"
	ML81930	3" Aluminum Roof Flashing	18"	18"	5-3/8"	5-1/8"	5-1/2"	2"
	ML81935	4" Aluminum Roof Flashing	18"	18"	4-3/4"	3-3/4"	6-1/2"	2-1/8"

Warranty

See warranty information for more details.

All dimensions listed are nominal. MAINLINE® reserves the right to make product and material changes at any time without notice.



Contact your sales representative for more information or visit our website at mainlinecollection.com