



**MAINLINE®**

# Stainless Steel Tees

## Product Specifications

### PRODUCT FEATURES

- Stainless Steel
- Push Connect Installation
- Safe for potable water
- Maximum Working Pressure: 200 PSI
- Maximum Temperature Rating: 200°F
- Compatible with Copper, CPVC, & PEX
- Behind the wall or direct burial



### MATERIALS

- Body Construction: AISI 304 Stainless Steel
- O-Ring: EPDM
- Grip Ring: AISI 301 Stainless Steel
- Tube Stiffener: Glass-filled Nylon (1/2"-1") or Copper (1-1/4"-2")

### PERFORMANCE


- Max Pressure: 200 PSI
- Max Temp: 200° F

### APPLICABLE STANDARDS/CODES

- IAPMO
- ASSE 1061 (Push Fit Fittings – UPC, IPC, cUPC)
- NSF/ANSI 372
- NSF/ANSI/CAN 61 – Sec. 9: Q≤1

Fitting Size	Insertion Depth
1/2"	1"
3/4"	1-3/16"
1"	1-3/16"
1-1/4"	1-7/8"
1-1/2"	2-1/8"
2"	2-3/16"

✓ To Submit	Part #	Size	A	B	C	D	E
	MLSS814R	1/2"	1.06"	1.06"	1.06"	2.69"	1.87"
	MLSS824R	3/4"	1.35"	1.35"	1.35"	3.39"	2.37"
	MLSS834R	1"	1.75"	1.75"	1.75"	3.72"	2.73"
	MLSS854R	1-1/4"	2.12"	2.12"	2.12"	5.26"	3.69"
	MLSS864R	1-1/2"	2.57"	2.57"	2.57"	6.06"	4.32"
	MLSS874R	2"	2.95"	2.95"	2.95"	6.72"	4.84"
	MLSS815R	3/4" x 1/2" x 1/2"	1.35"	1.06"	1.06"	3.07"	1.87"
	MLSS825R	3/4" x 1/2" x 3/4"	1.35"	1.06"	1.35"	3.23"	2.36"
	MLSS844R	3/4" x 3/4" x 1/2"	1.35"	1.35"	1.06"	3.18"	2.12"
	MLSS835R	1" x 1" x 3/4"	1.75"	1.75"	1.35"	3.42"	2.73"

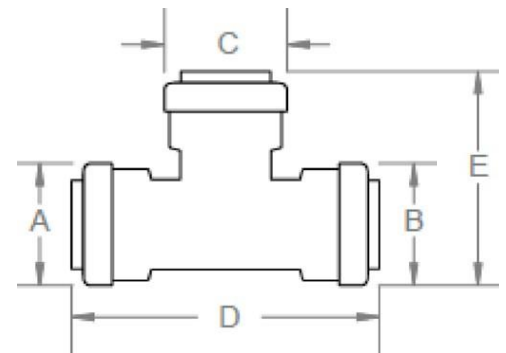

### Warranty

See warranty information for more details.

All dimensions listed are nominal. MAINLINE® reserves the right to make product and material changes at any time without notice.



Contact your sales representative for more information or visit our website at [mainlinecollection.com](http://mainlinecollection.com)