



**MAINLINE®**

# Stainless Steel Ball Valves

## Product Specifications

### PRODUCT FEATURES

- Stainless Steel
- Push Connect Installation
- Safe for potable water
- Maximum Working Pressure: 200 PSI
- Maximum Temperature Rating: 200°F
- Compatible with Copper, CPVC, & PEX
- Behind the wall or direct burial



### MATERIALS

- Body Construction: AISI 304 Stainless Steel
- O-Ring: EPDM
- Grip Ring: AISI 301 Stainless Steel
- Tube Stiffener: Glass-filled Nylon (1/2"-1") or Copper (1-1/4"-2")

### PERFORMANCE


- Max Pressure: 200 PSI
- Max Temp: 200° F

### APPLICABLE STANDARDS/CODES

- IAPMO
- ASSE 1061 (Push Fit Fittings – UPC, IPC, cUPC)
- NSF/ANSI 372
- NSF/ANSI/CAN 61 – Sec. 9: Q≤1

Fitting Size	Insertion Depth
1/2"	1"
3/4"	1-3/16"
1"	1-3/16"
1-1/4"	1-7/8"
1-1/2"	2-1/8"
2"	2-3/16"

✓ To Submit	Part #	Size	A	B	C	D	E
	MLSS912R	1/2"	1.06"	1.06"	3.11"	1.97"	5.32"
	MLSS922R	3/4"	1.35"	1.35"	3.80"	2.27"	5.70"
	MLSS932R	1"	1.75"	1.75"	4.21"	2.87"	6.46"
	MLSS952R	1-1/4"	2.12"	2.12"	5.82"	3.76"	7.67"
	MLSS962R	1-1/2"	2.57"	2.57"	6.87"	4.42"	8.37"
	MLSS972R	2"	3.22"	3.22"	7.47"	5.23"	10.06"

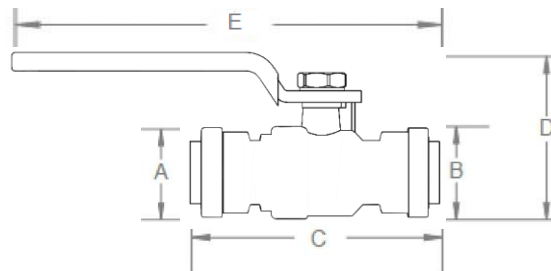

### Warranty

See warranty information for more details.

All dimensions listed are nominal. MAINLINE® reserves the right to make product and material changes at any time without notice.



Contact your sales representative for more information or visit our website at [mainlinecollection.com](http://mainlinecollection.com)