

Universal Integral Trap Urinal

Product Specifications



Features

- Grade A Vitreous China
- .125 Gpf Ultra High Efficiency
- Wall mounted urinal
- Washout flush action
- 3/4" Inlet spud
- Outlet connection threaded 2" inside NPTF
- Flushing Rim
- Optional Concealed Carrier Installation
- Extended Sides for Privacy
- Internal Trap
- Mounting Hardware Supplied
- Flush Valve Not Included
- WaterSense Certified only when Used with a .125 Gpf WaterSense Labeled Flush Valve



MLS10420

Certifications

- IAPMO cUPC
- US EPA WaterSense
- ASME A112.19.2
- ADA ANSI A117.1
- IAPMO Green
- Calgreen
- LEED Compliant

All dimensions listed are nominal. Mainline® reserves the right to make product and material changes at any time without notice.



Contact your sales representative for more information or visit our website at mainlinecollection.com


Revised 8/9/2021



MAINLINE®

Universal Integral Trap Urinal

Product Specifications

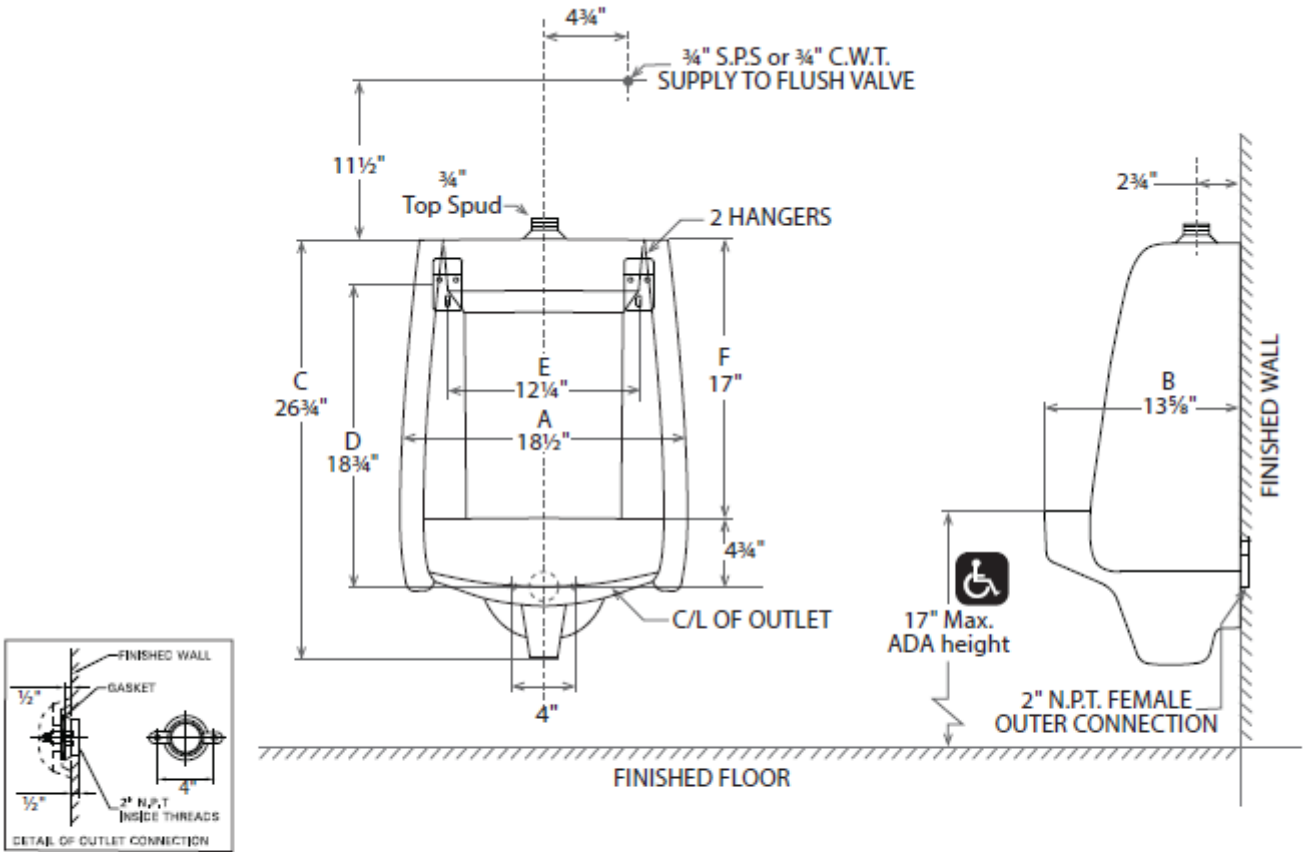

Shipping: 4.87 cube / 67.59 lbs (GW)



To Submit	Part No.	A	B	C	D	E	F
	MLS10420	18-1/2"	13-5/8"	26-3/4"	18-3/4"	12-1/4"	17"

Contact your sales representative for more information or visit our website at mainlinecollection.com