

### Features

- Includes clicker drain with 1-1/4" (32 mm) metal tailpiece.
- 5-3/8" (137 mm) spout reach.
- Handles sold separately.
- Laminar flow delivers a graceful stream of water.
- 1.2 gpm (4.5 lpm) maximum flow rate at 60 psi (4.14 bar).
- Coordinate with your choice of Artifacts handles for a personalized design.

### Material

- Brass.
- KOHLER finishes resist corrosion and tarnishing.

### Installation

- Widespread.

### Water Conservation & Rebates

- This product can help a building earn Water Efficiency points in LEED® Green Building Rating System.

### Required Products/Accessories

K-98068-3 Cross bathroom sink faucet handles

or

K-98068-3M Prong bathroom sink faucet handles

or

K-98068-4 Lever bathroom sink faucet handles

or

K-98068-9M Swing lever bathroom sink faucet handles

### Recommended Products/Accessories

K-23726 Drain treatment

K-23723 Faucet cleaner

K-72567 18" Towel Bar

K-72568 24" Towel Bar

K-72570 24" Double Towel Bar

K-72571 Towel Ring

K-72572 Robe Hook

K-72573 Pivoting toilet paper holder

K-72576 Toilet paper carriage

### Included Components

Additional Components:

Clicker drain



### Codes/Standards

ASME A112.18.1/CSA B125.1

NSF/ANSI 61

NSF/ANSI 372

All applicable US Federal and State material regulations

DOE - Energy Policy Act 1992

EPA WaterSense®





California Energy Commission (CEC)


### KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

### Available Colors/Finishes

*Color tiles intended for reference only.*

Color	Code	Description
	CP	Polished Chrome
	SN	Vibrant® Polished Nickel
	BN	Vibrant® Brushed Nickel
	BV	Vibrant® Brushed Bronze
	2BZ	Oil-Rubbed Bronze
	2MB	Vibrant® Brushed Moderne Brass

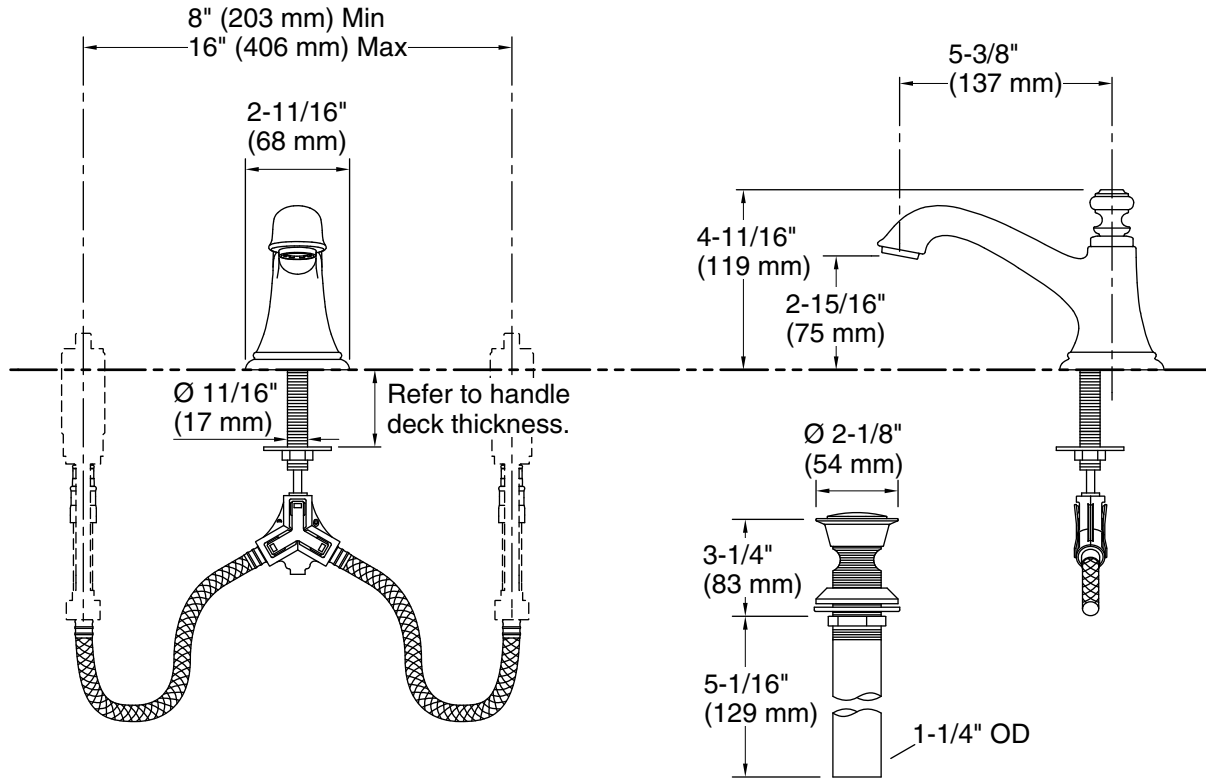

### Technical Information

All product dimensions are nominal.

#### Faucet:

Flow rate: 1.2 gal/min (4.5 l/min)

Pressure: 60 psi (4.1 bar)

Drain included: Yes

#### Spout:

Spout reach: 5-3/8" (137 mm)

### Notes

Install this product according to the installation guide.