




Standard Galvanized Base Roof Flashing

Product Specifications

FEATURES

- 24 gauge galvanized steel base with elastomer collar
- Fits any roof pitch to 45 degrees
- Tested for ultraviolet, ozone, and weather resistance
- Elastomer collar heat tested to 180 degrees Fahrenheit
- Approved for Type "B" installations

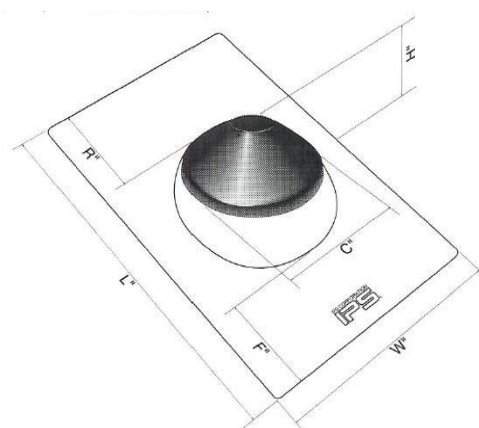

✓ To Submit	Part #	Description	Dim W	Dim L	Dim R	Dim F	Dim C	Dim H
	ML81850	1-1/4" or 1-1/2" Galvanized Roof Flashing	8-3/4"	12-1/2"	3-1/2"	2-3/8"	4-1/4"	2-1/4"
	ML81855	2" Galvanized Roof Flashing	8-3/4"	12-1/2"	3-1/2"	2-3/8"	4-1/4"	2-1/4"
	ML81860	3" Galvanized Roof Flashing	10-3/4"	14-1/2"	2-5/8"	2-3/8"	5-1/2"	2"
	ML81865	4" Galvanized Roof Flashing	12"	16"	3-3/4"	2-3/4"	6-1/2"	2-1/8"
	ML81870	1/2", 3/4" or 1" Tube Galvanized Roof Flashing	8-3/4"	12-1/2"	3-1/2"	2-3/8"	4-1/4"	2-5/8"
	ML81872	1-1/4" or 1-1/2" Galvanized Roof Flashing	18"	18"	6-1/4"	5-7/8"	4-1/4"	2-1/4"
	ML81874	2" Galvanized Roof Flashing	18"	18"	6-1/4"	5-7/8"	4-1/4"	2-1/4"
	ML81876	3" Galvanized Roof Flashing	18"	18"	5-3/8"	5-1/8"	5-1/2"	2"
	ML81878	4" Galvanized Roof Flashing	18"	18"	4-3/4"	3-3/4"	6-1/2"	2-1/8"
	ML81879	1/2", 3/4" or 1" Tube Galvanized Roof Flashing	18"	18"	6-1/4"	5-7/8"	4-1/4"	2-5/8"

Warranty

See warranty information for more details.

All dimensions listed are nominal. MAINLINE® reserves the right to make product and material changes at any time without notice.



Contact your sales representative for more information or visit our website at mainlinecollection.com