



The new degree of comfort.™



Residential Electric  
Professional Classic  
Point-of-Use Water Heaters

# Professional Classic™ Point-of-Use electric water heaters feature a space-saving design for installation in limited spaces

## Efficiency

- .95 EF for 30-gallon model
- Single resistored stainless steel heating element to prolong anode rod and tank life

## Features

- High efficiency heating element
- Over-temperature protector cuts off power in excess temperature situations
- Automatic thermostat keeps water at desired temperature
- Wall bracket for easy wall mount installations and corrosion resistant 1/4 turn drain valve included with 2.5 gallon model

## Plus...

- Temperature and pressure relief valve
- Exclusive Rheemglas® tank lining resists corrosion and prolongs tank life
- Meets or exceeds National Appliance Energy Conservation Act (NAECA) requirements
- These units are U.L. listed and comply with Underwriter's Laboratories Specifications 174
- Enhanced-flow brass drain valve on 2.5-gallon model
- Low lead compliant

## Warranty

- 6-Year limited tank and parts warranty.\*

\*See Residential Warranty Certificate for complete information


Units meet or exceed ANSI requirements and have been tested according to D.O.E. procedures. Units meet or exceed the energy efficiency requirements of NAECA, ASHRAE standard 90, ICC Code and all state energy efficiency performance criteria.



2.5-Gallon



6, 10, 15, 19.9 and 30-Gallon

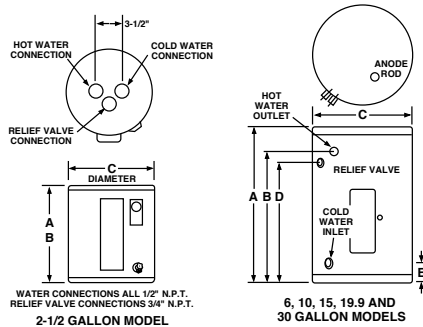

**Professional Classic**  
**Point-of-Use**  
 2.5, 6, 10, 15, 19.9 and  
 30-Gallon Capacities  
 120 Volt AC  
 2-Wire Single Phase  
 Electric



DESCRIPTION		FEATURES		ROUGHING IN DIMENSIONS (SHOWN IN INCHES)			ENERGY INFO.	
GAL. CAP.	MODEL NUMBER	HEIGHT A	HT. TO HOT WATER OUTLET B	DIAMETER C	HT. TO SIDE T&P VALVE D	HT. TO COLD WATER INLET E	APPROX. SHIP WT. (LBS.)	ENERGY FACTOR
2.5	PROE2 1 RH POU	14	14	9-3/4	-	-	22	N/A
6	PROE6 1 RH POU	15-1/4	12-1/2	15-3/4	11-1/2	4-1/4	36	N/A
10	PROE10 1 RH POU	23	20-1/2	15-3/4	19-1/2	4-1/4	46	N/A
15	PROE15 1 RH POU	24-1/4	22	17-3/4	21	4-1/2	54	N/A
19.9	PROE20 1 RH POU	25-1/4	22-3/4	19-3/4	21-3/4	5	69	N/A
30	PROE30 1 RH95 POU*	31-7/8	23-1/8	22-1/4	23	2-3/4	91	0.95

Energy Factor based on D.O.E. (Department of Energy) test procedures.  
\*For double element, substitute "2" suffix for "1". Not available in 120 volt. Available with 2-wire (single phase) outlet only. (6000 watt max.).

- **2.5 gallon model:** 1/2" N.P.T. inlet and outlet. Relief valve connection 3/4". Available with 120 or 240 volt AC single phase only, 120v (1440w) 240v (1500w) Power cord supplied with 120 volt models only.
- **6 through 30 gallon models:** 3/4" N.P.T. outlet, inlet, anode rod. T & P valve connections. Not available with 3 phase wiring. Water heaters furnished standard with 120 volt AC, 2000 watt single element. Special wiring options – a limited number of wiring options are available. Consult factory for price and availability.

**CONSTRUCTION DETAILS:** The cold water enters the tank a few inches from the bottom. Both hot and cold water lines may be connected directly to the water heater without special nipples or tees. The relief valve simply screws into the opening provided.

*In keeping with its policy of continuous progress and product improvement, Rheem reserves the right to make changes without notice.*

Rheem Water Heating • 101 Bell Road  
Montgomery, Alabama 36117-4305 • www.rheem.com



INTEGRATED HOME COMFORT