


### Pot Filler Kitchen Faucet

- |  |  |
|--|--|
| GT533-PFB Finish(B) <input type="checkbox"/>   | GT533-PFD Finish(D) <input type="checkbox"/> |
| GT533-PFBG Finish(BG) <input type="checkbox"/> | GT533-PFS Finish(S) <input type="checkbox"/> |
| GT533-PFC Finish(C) <input type="checkbox"/>   | GT533-PFY Finish(Y) <input type="checkbox"/> |

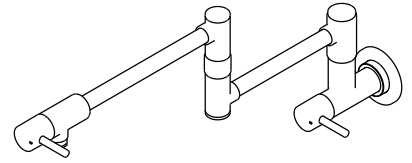

## Specifications

### Features

- 3.0 GPM Flow Rate
- 1-Hole Installation
- All Metal Construction
- 360° Rotating Spout
- Dual Shut Off Levers
- Mounting Hardware Included
- Swing Out Design
- Cold Water Installation Recommended
- Pforever Seal™ Ceramic Disc Valves
- Limited Lifetime Warranty

- Wall Mount Installation
- Pforever Seal™
- Pforever Warranty


### Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:



- IAPMO Certified to ASME A112.18.1/CSA B125.1
- NSF/ANSI/CAN61:Q≤1
- ADA Compliant - ANSI A117.1 (Lever Handles Only)

## Dimensions

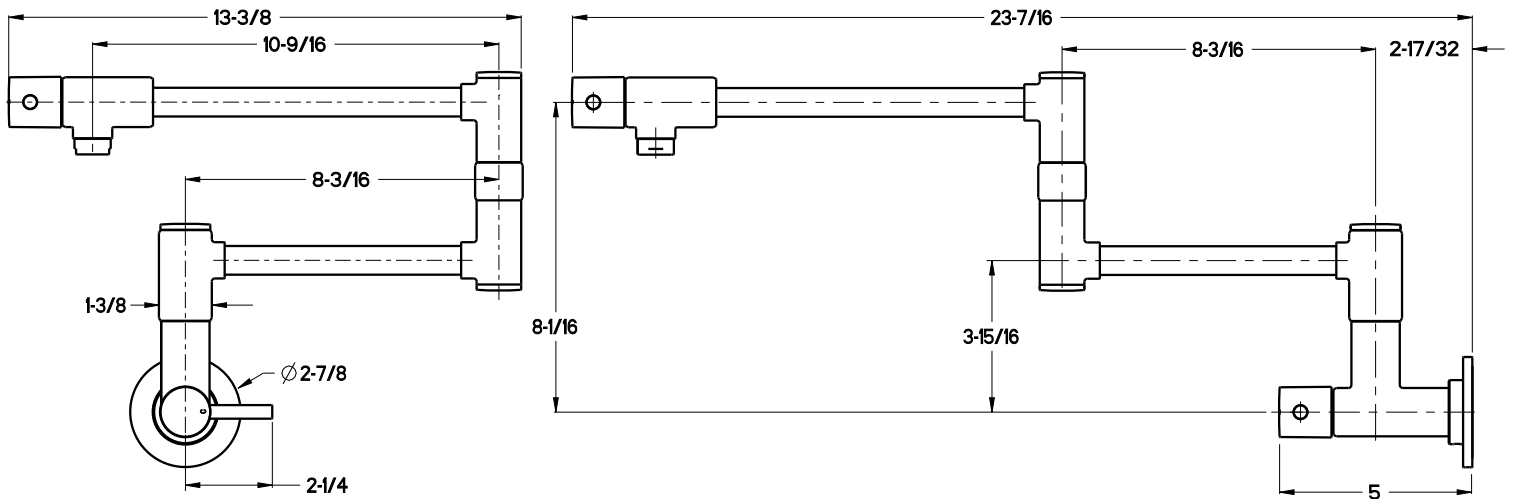

Pipe Size: 1/2-14 NPT-2B

Pipe's Protrusion From Wall: 3/8" (9.5mm) Min.

Wall Hole Size: 1-3/8 (34.9mm) min to 1-1/2 (38.1mm) Max.