

Mini Tank Series

1.5, 2.5, 4 and 6 Gallon Mini Tanks Deliver Hot Water Efficiently

Specifications

Electric Mini Tank Hot Water Heater

Performance Features

- Point-of-use heating eliminates long hot water pipe runs
- Compact design fits virtually anywhere
- Easy and ready to install
- Hot or cold water feed
- Adjustable temperature control 50°-140°F
- T&P relief valve included
- Glass lined tank for extended life
- Floor and wall mountable, wall bracket included
- Field replaceable element
- ETL tested to UL174 and NSF372
- EMT1, EMT2.5 and EMT4 plug into standard outlets, cord included. EMT6 must be hard wired, pig tail included
- Single weld design
- Tank status indicator light –
Green: ready mode
Red: heating mode
- Warranty, five (5) years limited on leaks, two (2) years on defects



NO LEAD*


The wetted surface of this product contacted by water contains less than 0.25% lead and meets ANSI/NSF 372



Product Specifications

- Voltage: 120 volts
- Amperage: 12 amps
- Heating Capacity: 1440 watts
- Phase: Single
- Temperatures: 50°-140°F
- Max. Operating Pressure: 150 PSI

	Tank Volume (gals)	Weight (lbs.)	Fittings	Recovery time based on 60° temp. rise
EMT1	1.5	15.1	1/2" NPT connections at TOP of unit	8 minutes
EMT2.5	2.5	17.0	1/2" NPT connections at TOP of unit	15 minutes
EMT4	4	18.1	1/2" NPT connections at TOP of unit	24 minutes
EMT6	6	20.9	3/4" NPT connections at TOP of unit	37 minutes

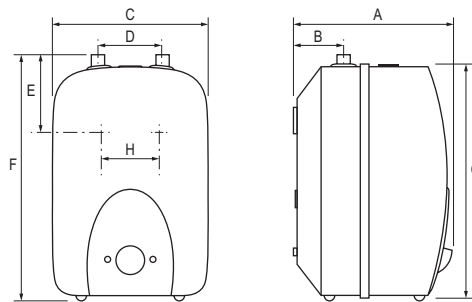

Dimensions	EMT1		EMT2.5		EMT4		EMT6	
Key	inch	mm	inch	mm	inch	mm	inch	mm
A	9.83	249.7	11.25	285.8	12.76	324.1	14.36	14.24
B	3.03	77.0	3.13	79.5	3.94	100.1	3.46	3.35
C	9.72	246.9	10.91	277.1	12.27	311.7	13.85	13.85
D	3.94	100.1	3.94	100.1	3.94	100.1	3.94	3.94
E	5.08	129.0	5.61	142.5	6.46	164.1	7.52	7.52
F	15.09	383.3	16.89	429.0	18.03	458.0	20.96	20.79
G	14.29	363.0	16.09	408.7	17.31	439.7	19.81	20.01
H*	2.52	64.0	2.52	64.0	2.52	64.0	2.52	2.52

*Mounting bracket location on the back of unit

Special Design Service

Inquiries for units for unique applications are welcome. Call our Technical Service department at **1-800-543-6163**.

Suggested Specification

Water heater shall be an Eemax Mini Tank model number EMT_____.

Unit shall be glass lined with a single weld design. Water connections and supplied T&P valve to be located on top of the unit. Unit shall have an status indicator light with adjustable thermostat. Unit to have a 5 year warranty against leaks. Certified to UL 174.

Mini Tank Series

1.5, 2.5, 4 and 6 Gallon Mini Tanks Deliver Hot Water Efficiently

Specifications

Electric Mini Tank Hot Water Heater

Eemax Mini Tank Installation


Save water by eliminating the wait for hot water to reach the faucet. Simply tap into the water line and install the heater directly at the sink. No need for costly recirculating lines and pumps. And when you want to eliminate the wait for hot water but need more volume, install the Eemax heater in-line with a larger hot water source, such as a tankless heater or a storage tank heater. Lightweight and compact.

MODEL NUMBER	KW	TANK VOLUME	DIMENSIONS	WATER CONNECTIONS	RELIEF VALVE	SHIPPING WEIGHT	PLUG IN
VOLTS 120							
C EMT1	1.4	1.5 gallons	15.25" H x 9.75" W x 10" D	1/2" NPT	Included	13 lbs.	Yes
C EMT2.5	1.4	2.5 gallons	17" H x 11" W x 11.25" D	1/2" NPT	Included	19 lbs.	Yes
C EMT4	1.4	4.0 gallons	18.25" H x 12.5" W x 13" D	1/2" NPT	Included	23 lbs.	Yes
C EMT6	1.4	6.0 gallons	21" H x 14" W x 14.25" D	3/4" NPT	Included	30 lbs.	No*


C indicates evaluation and compliance to Intertek (ETL) under CAN/CSA-C22.2 No. 110.
*Pigtail included.

Sample Installations


Standalone Point-of-Use Heating Application

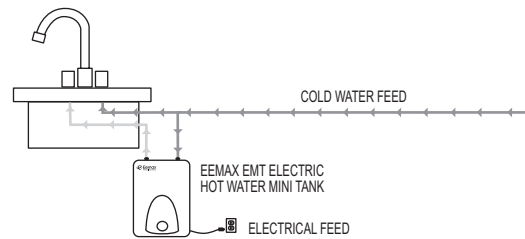

Standalone Point-of-Use Multi fixture Application

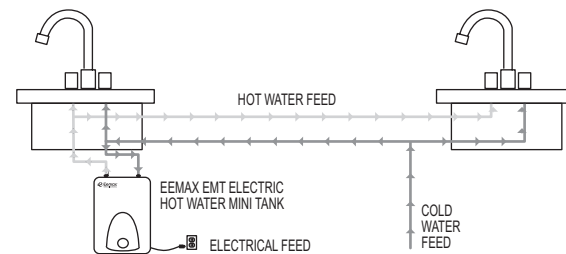

Point-of-Use Booster Heating Application from Central Tank Heating System

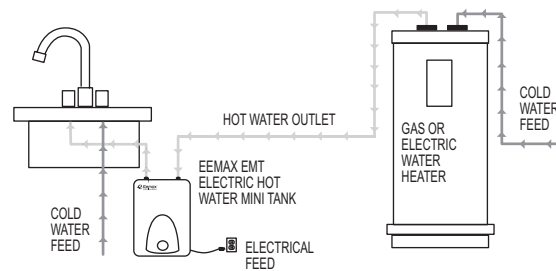

Cure for "Cold Water Sandwich" Gas Tankless Heating Application

