
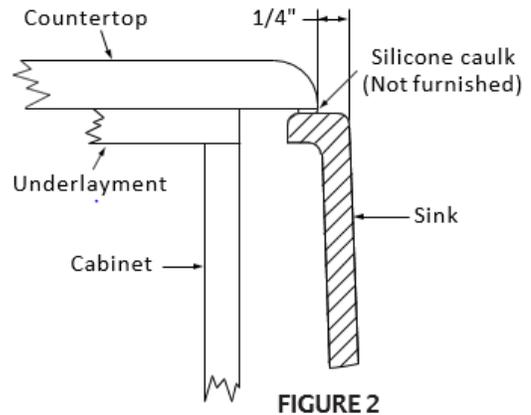


Installation Instructions


Farmhouse Undermount Sinks Only

- The fireclay farmhouse sinks are reversible by design offering you two options to select. The installation dimensions will be different depending on which farmhouse side you wish to see. The front and back walls of the sink are not the same thickness by design. IT IS CRITICAL THAT THE CABINET MAKER, COUNTERTOP FABRICATOR, AS WELL AS THE CABINET INSTALLER UNDERSTAND THE EXPECTATIONS OF THE CONSUMER.
- A custom sink base cabinet is **required**.
- Proper installation requires a coordinated effort including advanced dialog between the designer (or customer), the cabinet maker, the countertop fabricator and the sink installer during the design and installation phase.
- It is **required** that a support frame be constructed inside the cabinet for adequate support of the sink as shown in Figure 1.
- It is recommended that the sink countertop cutout provide a reveal into the sink bowl opening as shown in Figure 2.

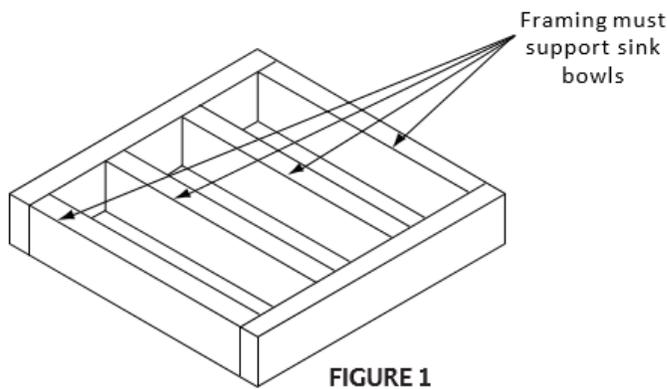

Undermount Sinks Only

- It is **required** that a support frame be constructed inside the cabinet for adequate support of the sink as shown in Figure 1.
- It is recommended that the sink countertop cutout provide a 1/8 inch overhang into the sink bowl opening as shown in Figure 3. Do not reduce this 1/8 inch dimension since the bowl shape and overall size will have dimensional variation.

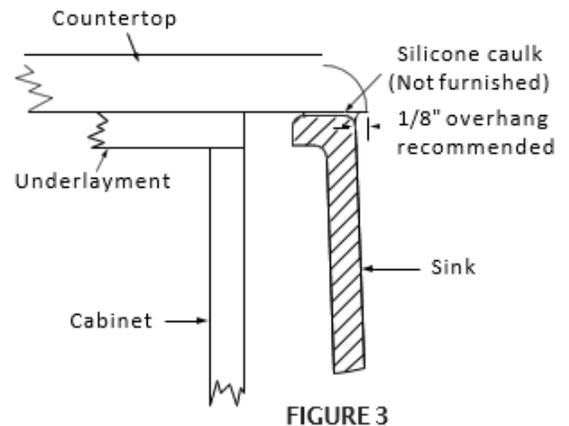

INSTALLATION TIPS

- The manufacturer recommends that Fireclay sinks be installed by a professional, experienced installer.
- **WARNING:** Due to the dimensional variation inherent in the fireclay manufacturing process, sink cutout templates are not provided. The manufacturer recommends using the actual sink for the countertop cutout.
- The manufacturer recommends providing the cabinet maker with the actual sink to be installed prior to cabinet fabrication.
- It is recommended that you discuss with your customer the desired finished appearance of the sink and countertop installation. The manufacturer is not responsible for improper sink and/or countertop installations.
- **WARNING:** The support frame and proper support for the sink must sufficiently support 300 lbs. This is the approximate weight of the sink when full and applies to both installations shown below.
- Undermount sinks should only be fastened to a solid surface countertop (i.e. granite / Corian®).
- The manufacturer is not responsible for the sink or countertop if damaged during installation.
- Fireclay sinks are heavy, please arrange for assistance to move or position.
- Follow all local plumbing and building codes.
- Inspect sink for damage prior to beginning installation.

Installation Instructions

Care & Cleaning Guidelines

With proper care and maintenance, your fireclay sink will give you a lifetime of service. Below are the suggestions for the care and cleaning of your sink.

General Cleaning

It is recommended to clean your sink daily to avoid build-up of soap or mineral deposits, as these tend to have an adverse effect on the appearance of the product. For daily cleaning use an ordinary mild detergent and soft cloth to rinse and dry the sink. Allowing water or cleaners to evaporate will negatively impact the look of the sink. To avoid this, it is important to dry the sink after each use.

- To avoid unwanted build-up, it is recommended to dry your sink after each use.
- Soft abrasive cleaners may be used when necessary (Blue Scotch-Brite Pads). Strong abrasive cleaners will scratch and dull the surface (Green Scotch-Brite Pads).

Do's

- It is recommended the use of a bottom grid or rinsing basket to protect your sink.
- Run cold water when pouring boiling water into sink.
- It is recommended that you clean your sink prior to first use.

Don'ts

- Avoid storing open containers of household cleaners and chemicals containing chloride such as bleach, acid, and drain cleaners or toilet bowl cleaner beneath the sink. Vapor emission from the chlorides can cause corrosion and pitting to the exposed stainless steel and other metals including faucet water supply lines.
- Do not use dish mats as these can trap soap and dirt making sink maintenance more time-consuming and cultivate harmful bacteria.
- Do not leave standing water in your sink, especially if the water contains anything that could stain the sink (i.e. coffee or tea).

Fireclay

- For difficult stains a 50/50 water/bleach solution or non-abrasive cleaners (follow cleaner manufacturer's instructions) can be used, rinse and towel dry the sink afterwards. DO NOT leave bleach or a bleach solution sitting in the sink.
- Do not set hot pans directly into sink.
- Though fireclay sinks are resilient. They can be chipped or cracked with metal or stone objects. Use caution and never throw or drop anything into a fireclay sink.
- Stubborn stains and water marks can be wiped with the eraser pad in Elkay's cleaning kit or a Mr. Clean® Magic Eraser® and either water or a 50/50 white vinegar and water solution. Towel dry with a cotton cloth.

Recommended Cleaning Products:

Fantastik Antibacterial Heavy Duty
Formula 409 Antibacterial All Purpose
Green Works All-Purpose
Soft Scrub Gel with Bleach
Soft Scrub Lemon Cleanser

Success with cleaners are dependent on the quality of the water being used. Failure to follow care and cleaning will void your warranty. For additional information, please visit elkay.com.

Home Remedies

For major stains or grime on your sink, a mixture of a half a cup of white vinegar and a half cup of water will help. Dip a cloth into the solution and rub away the grime or stain. The solution should then be rinsed off and dried to prevent damage to your sink's finish.

Another solution for major grime or stains, is a small amount of baking soda and water on a toothbrush. This should remove any nasty stains. Again, the solution should then be rinsed off and dried to prevent damage to the finish of your sink.

DO NOT allow any part of your sink to soak in either of the above mixtures. It is also recommended to test the above mixtures on an unseen part of your faucet to see what affect it has to the finish of your sink.





Luxart products manufactured by Elkay will be covered by Elkay's warranty as follows:

Elkay Fireclay Sinks Limited Lifetime Warranty

Elkay warrants to the original purchaser of an Elkay Fireclay sink that Elkay will, at its option, replace or repair, without charge, such product if it fails under normal residential use due to a manufacturing defect for the lifetime of normal residential use. Product replacement does not include transportation cost or labor installation cost. This warranty covers only Elkay Fireclay farmhouse and undermount sinks installed in a conventional solid surface counter top and applies to residential installations only. Elkay reserves the right to examine product in question and its installation prior to repair or replacement.

Waste fittings and accessories are warranted for 1 year from the date of purchase.

Other Warranty Conditions on Sinks

This warranty applies to sinks purchased after August 1 2008 as shown on the purchaser's dated receipt. For sinks purchased prior to August 1 2008, the applicable warranty at that time will be in effect. Our warranty does not cover product failure or damage caused by the use of optional Elkay or non-Elkay accessories, abusive treatment, misuse, environmental factors, normal wear including dents and scratches, improper care and cleaning, use of aggressive and abrasive cleaners, damage due to handling or failure to follow the recommended procedures for installation, care and maintenance as detailed in the installation and care guide provided with every sink.

This warranty is extended only to the original consumer purchaser of the product. This warranty does not cover shipping costs, labor costs, or any other charges for such items as installation or replacement of the sink, diagnosis or replacement of any faucet or component part, or any other expense or loss. This warranty also does not cover obsolete, discontinued nor display products, whether such items are purchased at discount outlets and/or on-line or sold on clearance or close out.

All incidental or consequential damages are specifically excluded. No additional warranties, express or implied are given, including but not limited to, any implied warranty of merchantability or fitness for a particular purpose.

Some states do not allow the exclusion or limitation of incidental or consequential damages or limitations on how long an implied warranty lasts, so the above limitations or exclusions may not apply to you.

This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

To Obtain Service Under Warranty

1. Write to: Elkay Manufacturing Company
Attention: Consumer Care
1333 Butterfield Road, Suite 200 Downers Grove,
Illinois 60515
2. Include a letter containing the following information:
 - a. Date of purchase and installation.
 - b. Proof of Purchase (copy of original dated invoice)
 - c. Description of nature of defect.
 - d. Model number or description of model and/or component part if possible.

